

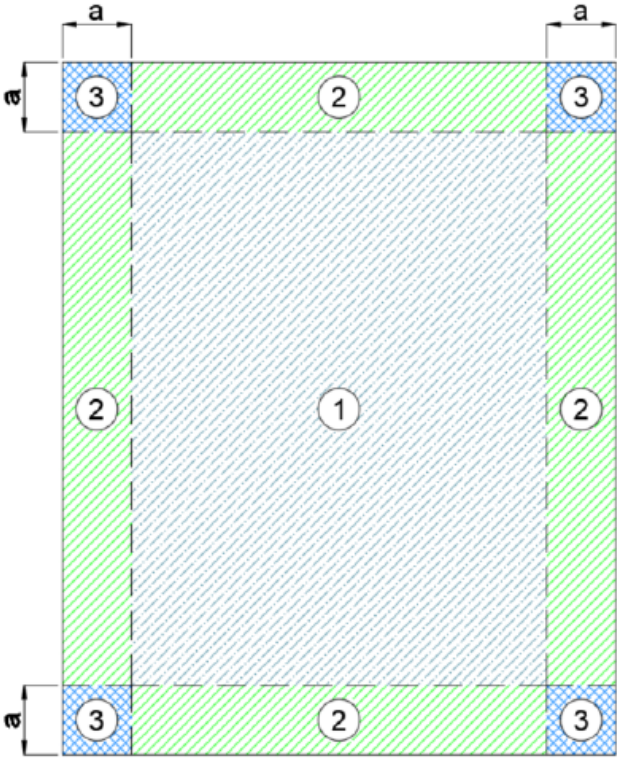
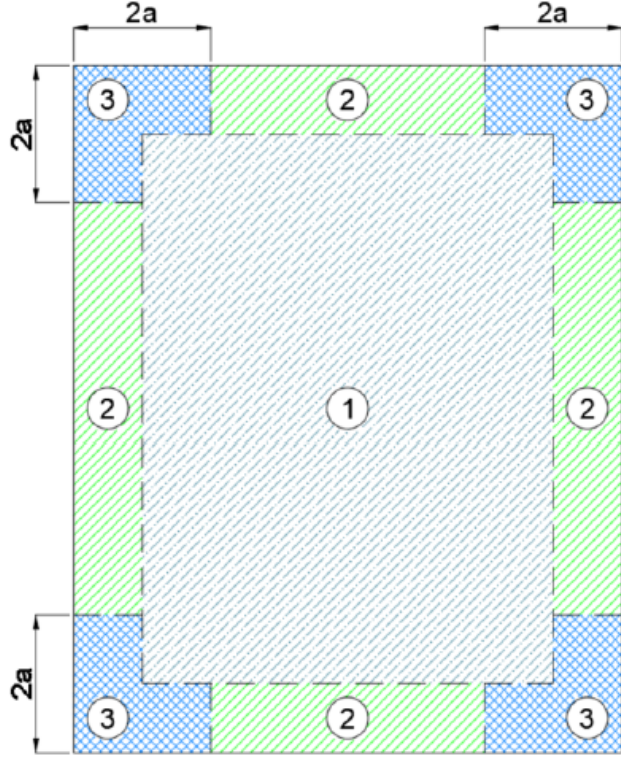
# Roof Enhancements

## RED SHIELD WARRANTY ENHANCEMENTS

Firestone Red Shield Warranties only require enhancements of the Perimeter and Corner attachment when one of the following conditions exist:

1. Roof Height exceeds 100'
2. Insulation adhesives is used on Warranty durations of 20 years and greater.
3. Increased Wind Speed Warranties are required (72 mph and greater).

Roof zones, as depicted below, represent the minimum roof zone construction required for warrantability and may not meet the requirements of the local Building Code, Specifications, or Building Owner requirements.

Roof Heights Where $h \leq 60$ ft.	Roof Heights Where $h > 60$ ft.
	
<p>Notation:</p> <p><math>a</math> = 10 percent of least horizontal dimension or <math>0.4h</math>, whichever is smaller, but not less than either 4% of least horizontal dimension or 3 ft.</p> <p><math>h</math> = Eave height shall be used for roof slopes under 2:12.</p>	<p>Notation:</p> <p><math>a</math> = 10 percent of least horizontal dimension, but not less than 3 ft.</p> <p><math>h</math> = Eave height shall be used for roof slopes under 2:12.</p>