




Firestone Building Products

RubberGard™ EPDM Membrane

Fully Adhered, Concrete Deck

25 Year
Red Shield™
Warranty

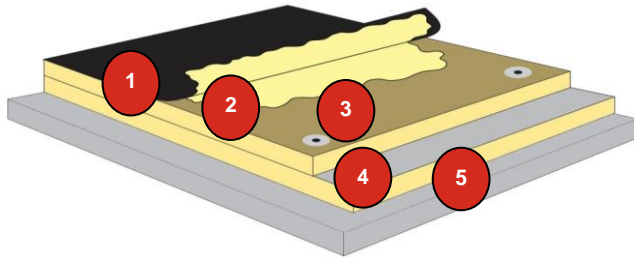

1. Firestone RubberGard EPDM Membrane
2. Fully Adhered with Bonding Adhesive
3. Mechanically Attached or Adhered Cover Board (Optional)
4. Mechanically Attached or Adhered Insulation
5. Concrete Deck

Consult Firestone Technical Specifications, Guides and Details at www.firestonebpco.com

Slope Requirement

Positive slope required for warranty.

Construction Type

New construction, complete tear-off, or recover with any wet or damaged materials removed prior to installation.

Building Height Limitation

Firestone RubberGard EPDM Adhered Systems are limited to buildings 250' (76.2 m) or less.

Use of Air Barrier

An air barrier is recommended for projects with large wall openings greater than 10% of the total wall area.

Base Tie-Ins

Must be attached to substrates which provide a minimum of 200 lbf (1 kN) in any direction.

Increased Wind Speed and Codes

Any wind speed coverage exceeding 55 mph (88 km/h) or projects with codes requirements must be reviewed by a Firestone Roof Systems Advisor.

Deck Requirement

- Minimum 3000 psi Structural Concrete

Fastener Type

- Firestone Heavy Duty Fastener
- Firestone Concrete Drive Fastener
- Firestone HailGard™ Fastener (with HailGard Composite Board or OSB only)

Insulation Adhesive*

- Firestone I.S.O. Twin Pack™ Insulation Adhesive
- Firestone I.S.O. Spray™ S Insulation Adhesive
- Firestone I.S.O. Fix™ II Insulation Adhesive
- Firestone I.S.O. Stick™ Insulation Adhesive

*NOTE: Max. 4' x 4' boards must be used when attaching insulation with adhesives.

Adhesive Attachment

- Bead Spacing: F: 12", P: 6", C: 4"
- Full Application (I.S.O. Spray S Insulation Adhesive)

Membrane Requirement

- RubberGard EPDM, Minimum 0.060"
- RubberGard MAX EPDM, Minimum 0.060"

Seaming Requirement

3" QuickSeam™ Splice Tape and 5" QuickSeam Flashing OR 6" QuickSeam Splice Tape in side and end laps. QuickSeam Joint Covers are required at all joints and at angle changes 1:12 or greater.

Firestone Membrane Adhesive

- EPDM Bonding Adhesive BA-2004 (T)
- Single-Ply LVOC Bonding Adhesive
- Single-Ply LVOC Bonding Adhesive 1168

Edge Metal System

- Firestone EdgeGard™ System
- Firestone AnchorGard™ System
- Firestone Coping System
- Firestone Aluminum Drain Bar

Insulation Mechanical Attachment Rates for Standard 55 mph Wind Speed

Insulation (Top Layer) and Optional Coverboard 4'X8'

1.0" to 1.4" Firestone ISOGARD / ISO 95+ GL or ISOGARD GC / Resista Insulation	16	¼" SECUROCK® Gypsum Fiber Board	10
1.5" to 1.9" Firestone ISOGARD / ISO 95+ GL or ISOGARD GC / Resista Insulation	12	½" SECUROCK Gypsum Fiber Board	8
2.0" to 4.0" Firestone ISOGARD / ISO 95+ GL or ISOGARD GC / Resista Insulation	8	¾" SECUROCK Gypsum Fiber Board	8
1.5" to 1.9" / 2.0" to 4.0" Firestone ISOGARD HG™ / HailGard Composite	12 / 8	¼" DensDeck® Roof Board / DensDeck Prime Roof Board	16 / 12
Firestone ISOGARD HD Composite Board	8	½" DensDeck Roof Board / DensDeck Prime Roof Board	12 / 10
Firestone ISOGARD HD Cover Board	12	¾" DensDeck Roof Board / DensDeck Prime Roof Board	8

Detail Description

Wall Terminations:	Firestone Termination Bar with AP Sealant applied along the caulk lip. Surface mounted or inserted counter flashing may also be used in accordance with current Firestone 30 year details.
Curb & Wall Flashings:	Curbs, walls, and expansion joints must be anchored with appropriate base tie-in detail, using QuickSeam Reinforced Perimeter Fastening Strip (RPF) and Batten Strip or 2" Metal Seam Plates. Curbs and walls must be flashed using one ply minimum 0.060" RubberGard EPDM, QuickSeam Curb Flashing, or 18" QuickSeam SA Flashing, per Firestone 30 year details.
Corners:	QuickSeam Corner Flashing or 9" QuickSeam FormFlash™ Flashing may be used, per Firestone 30 year details.
Roof Edges/Parapets:	Firestone AnchorGard™ or EdgeGard™ Fascia or Drain Bar systems. ANSI/SPRI ES-1 rated edge metal may also be used. Complete per Firestone 30 year details.
Penetrations:	Flash with QuickSeam Pipe Flashing, QuickSeam EPDM Penetration Pocket, or field fabricate with EPDM flashing, per Firestone 30 year details.

NOTE:

1. Only Firestone brand products are covered in a Red Shield warranty.
2. Refer to the Firestone Technical Database at www.firestonebpco.com for additional information regarding RubberGard EPDM Roof Systems.
3. DensDeck is a registered trademark of Georgia-Pacific Gypsum LLC.
4. It is the installing contractor's responsibility to follow applicable building codes.
5. SECUROCK is a registered trademark of USG Corporation.

QS-EPDM-101

Firestone Building Products Company, LLC

200 4th Avenue South • Nashville, TN 37201
Technical: 1-800-428-4511 • Sales: 1-800-428-4442
• www.firestonebpco.com

Rev. 1/16/2018