


RubberGard™ EcoWhite™ EPDM QuickSeam™ SA Patch For Conduit Flashing

Item Description
SA Patch

Item Number
W56RAC160H

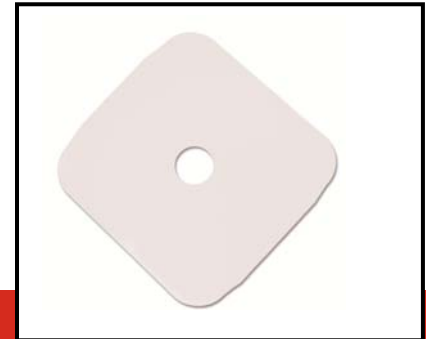

Product Information

Description:

RubberGard EcoWhite EPDM QuickSeam SA Patch for Conduit Flashing ("EW QS SA Patch for Conduit Flashing") consists of 18" X 18" EcoWhite membrane fully and completely factory laminated to EcoWhite seam tape with a 3¼" diameter hole die-cut in the center. It can be used to flash the flange of QuickSeam Conduit Flashings in conjunction with EcoWhite roofing systems where allowed by Firestone specifications.

EcoWhite tape is used as the tape adhesive to field splice EW QS SA Patch for Conduit Flashing to primed flanges of QuickSeam Conduit flashings and EcoWhite membrane. The polymeric release liner (protects the tape until field application) is perforated to allow removal of the liner in separate sections.

Method of Application:

1. Prime all surfaces (membrane and flanges) to receive EW QS SA Patch for Conduit Flashing using Single-Ply QuickPrime™ Primer or Single-Ply LVOC Primer scrub applied with QuickScrubber™ Pad and Handle.
2. Allow primer to flash off. Use Touch-Push test to verify primer readiness.
3. Remove release liner in sections to mate EW QS SA Patch for Conduit flashing to primed substrates only when EW QS SA Patch for Conduit Flashing is properly positioned over primed substrate.
4. Roll the freshly mated EW QS SA Patch for Conduit Flashing with silicone coated rubber hand roller to ensure proper mating.
5. Apply seam edge treatment at all lap edges of the EW QS SA Patch for Conduit Flashing: the perimeter and the die-cut center hole.

Storage:

- Store in original unopened containers indoors at temperatures between 60 °F (15.6 °C) and 80 °F (26.7 °C).
- Do not store on roof in direct sunlight or at temperatures above 100 °F (37.7 °C).
- When exposed to lower temperatures; restore to room temperature prior to use.
- Shelf life of one year can be expected when stored in original container at temperatures between 60 °F (15.6 °C) and 80 °F (26.7 °C).
- Shelf life will be shortened if exposed to elevated temperatures.

Packaging:

- 25 pieces per carton
- 20 cartons per pallet

RubberGard™ EcoWhite™ EPDM QuickSeam™ SA Patch For Conduit Flashing

LEED® Information:

Post Consumer Recycled Content: 0%
 Post Industrial Recycled Content: 0%
 Manufacturing Location: Michigan Center, MI
 *NOTE: LEED® is a registered trademark of the U.S. Green Building Council.

Typical Properties

Property	Value
QuickSeam Tape:	
Base	Rubber Polymers
Color	White
Solvents	None
Solids	100%
Cured State	Cured
Thickness	0.020" (0.508 mm) ± 0.005"(0.127 mm)
Dimensions	18" X 18"(457.2 mm X 457.2 mm) with 3¼" diameter center hole
Membrane:	
Base	EPDM, Non-reinforced
Color	White top ply over black ply
Solvents	None
Solids	Cured
Cured State	0.060" (1.52 mm) ± 0.005"(0.127 mm)
Thickness	18" X 18" (457.2 mm X 457.2 mm) with 3¼" diameter center hole
Release Liner:	The tape portion of EW QS SA Patch for Conduit Flashing is protected by polymeric release liner, perforated to allow removal in separate sections to facilitate application.

Please contact Quality Building Services Technical Department at 1-800-428-4511 for further information.

This sheet is meant to highlight Firestone products and specifications and is subject to change without notice. Firestone takes responsibility for furnishing quality materials which meet published Firestone product specifications or other technical documents, subject to normal roof manufacturing tolerances. Neither Firestone nor its representatives practice architecture. Firestone offers no opinion on and expressly disclaims any responsibility for the soundness of any structure. Firestone accepts no liability for structural failure or resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No Firestone representative is authorized to vary this disclaimer.